Test Report No. S08MEC04781/A2/EMK
dated 18 Aug 2008

PSB Singapore

Choose certainty.
Add value.

Note: This report is issued subject to TÜV SÜD PSB's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

SUBJECT:

Laboratory measurement of airborne sound transmission loss of "Besta" composite mineral board system submitted by Best Rock Building Systems Pte Ltd on 4 Aug 2008.

TESTED FOR:

Best Rock Building Systems Pte Ltd
14 Zion Road
Singapore 247732

Attn : Mr Daniel Wong

DATE OF TEST:

8 Aug 2008

DESCRIPTION OF SAMPLES:

The "Besta" composite mineral board system of 3.20m (width) x 3.15m (length) x 100mm (thick) was installed onto the sample carrier by Best Rock Building Systems Pte Ltd.

The dimension of each composite mineral board was 3145mm (length) x 600mm (width) x 100mm (thick). Each composite mineral board consisted of Perlite materials enclosed by 10mm thick "Besta" board. The mass of each composite mineral board measured to be 93kg.

The joining of panel-to-panel and the perimeter seal of the composite mineral board system was used by silicone sealant.

The drawing description of the composite mineral board system was shown in Figure 4.

Best Rock Pte Ltd

PSB TEST
Your Peace of Mind

ilac-MRA ACCREDITED LABORATORY SAC-SINGLAS

LA-2007-0380-A
LA-2007-0380-A-1
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0383-G
LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
Testing Services
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: testing@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
3 Science Park Drive, #04-01/05
The Franklin, Singapore 118223

METHOD OF TEST:

The test was conducted in accordance with ASTM E90 - 04 "Standard test method for laboratory measurement of airborne sound transmission loss of building partitions and elements"

Measured area of panel opening: 3.20m (width) x 3.15m (height) = 10.06m^2
Air temperature in both source room and receiving room : 26°C
Relative air humidity in both source room and receiving room : 65%
Source room volume : 74m^3
Receiving room volume : 84m^3
Location of the test : Acoustics Lab of TÜV SÜD PSB Pte Ltd

TEST EQUIPMENT:

The following instruments were used for the test.

1) A dual-channel real-time frequency analyser (B&K Type 2133)
2) Two units of loudspeaker (JBL MPro MP415)
3) Two sets of ½" condenser microphones (B&K Type 4190)
4) Two sets of microphone preamplifers (B&K Type 2669)
5) A sound pressure level calibrator (Norsonic Type 1251)
6) A sound source amplifier (Crown model CE 1000)
7) Two sets of rotating microphone booms (B&K Type 3923)

Best Roots Pte Ltd

TEST PROCEDURES:

1) Instrumentation was set up according to ASTM E90.

2) Measurement system was calibrated using a sound level calibrator Norsonic Type 1251.

3) Background noise level for both source room and receiving room were measured.

4) Sound source system was switched on and maintained at constant level. The sound pressure level in the receiving room was ensured to be 15dB higher than the background noise level.

5) Recording time for both rotating microphone booms was set to 64s which equals to the time taken by the booms to complete two revolutions.

6) Sound pressure level difference between the source room and the receiving room was measured with a dual – channel acoustic analyser (B&K 2133), and the measurement was repeated thrice.

7) Step 6 was repeated after the loudspeaker was moved to new position.

8) Reverberation time (RT) of the receiving room was measured from two different loudspeaker positions. Each loudspeaker position was measured twice.

9) The mean values of the six readings for sound pressure level difference and four readings for RT values were calculated.

10) Values of sound reduction index were determined for each 1/3 octave frequency band from 100Hz to 5kHz based on the mean values of step 9.

11) Sound transmission class was determined at the frequency of 500Hz of the shifted reference curve according to ASTM E413

Best Book Pte Ltd

RESULTS:

Values of sound transmission loss (TL) of the tested sample were tabulated in Table 1. Sound insulation rating was computed according to ASTM E413 - 04 "Classification for rating sound insulation".

Table 1 : Measured Sound Transmission Loss, TL and values of the shifted reference curve for STC = 36

1/3 Octave Band Frequency (Hz)	Measured Sound Transmission Loss, TL (dB)	Shifted Reference Curve STC = 36 (dB)	Deficiency
100	30.0	17.0	0.0
125	27.9	20.0	0.0
160	30.2	23.0	0.0
200	29.8	26.0	0.0
250	29.3	29.0	0.0
315	30.1	32.0	1.9
400	31.7	35.0	3.3
500	34.2	36.0	1.8
630	35.6	37.0	1.4
800	36.3	38.0	1.7
1000	36.6	39.0	2.4
1250	36.8	40.0	3.2
1600	37.3	40.0	2.7
2000	37.6	40.0	2.4
2500	37.4	40.0	2.6
3150	38.7	40.0	1.3
4000	41.4	40.0	0.0
5000	44.9	40.0	0.0
Total deficiency (125Hz – 4000Hz) :			25

The values in Table 1 were plotted as shown in Figure 1.

Remark:

The tested "Besta" composite mineral board system achieved sample has a sound transmission class, STC = 36

Francis Ee Min Kuen
Testing Officer

Dr Sun Qiqing
Assistant Vice President
Acoustics & Vibration
Testing Services

PSB Singapore

RESULTS: (cont'd)

Figure 1 : Sound transmission performance of "Besta" composite mineral board system

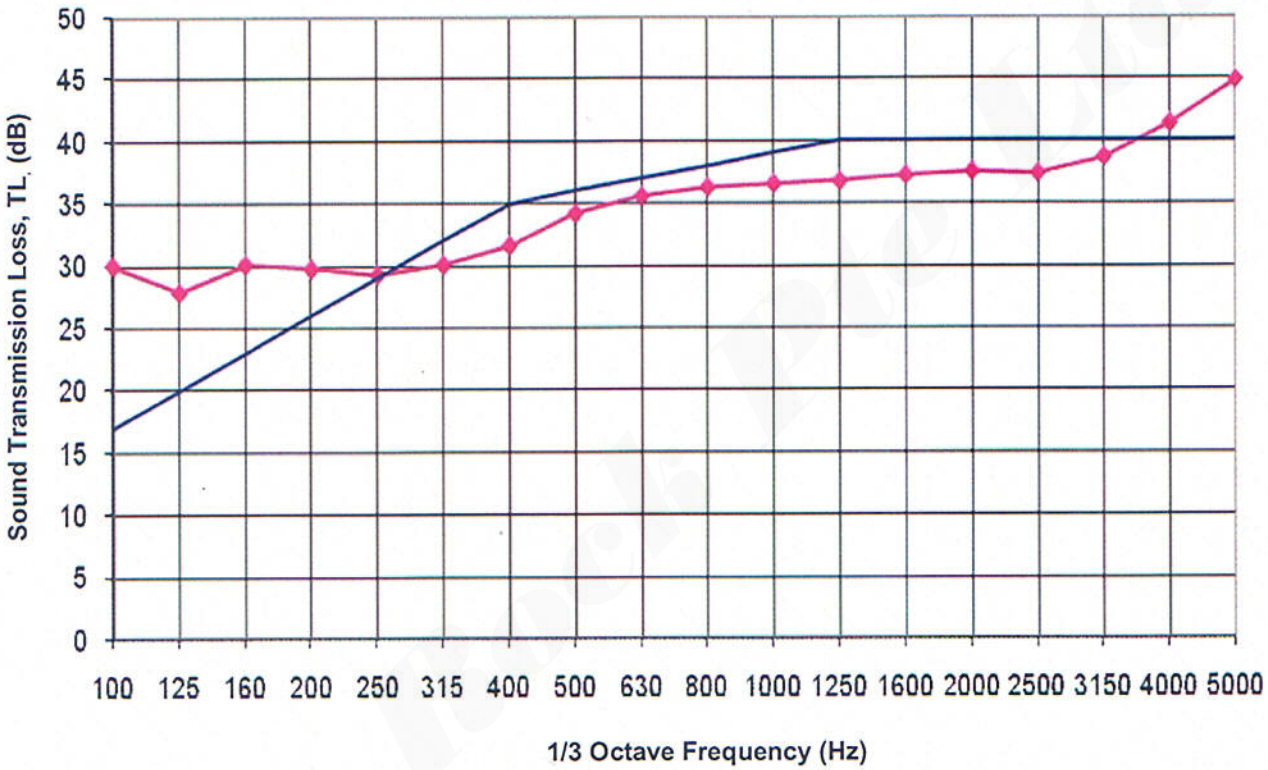

Best Test Lab

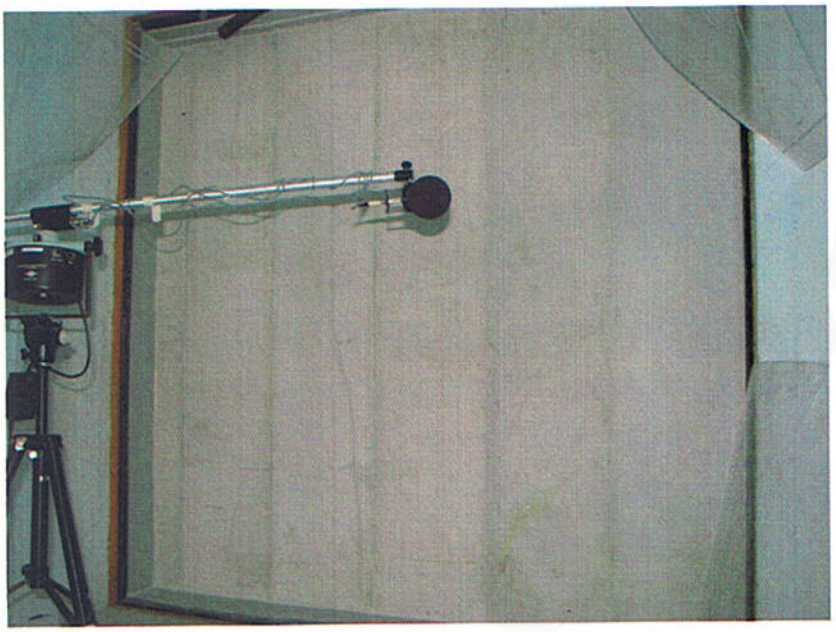

Figure 2 : "Besta" composite mineral board system facing the source room

Figure 3 : "Besta" composite mineral board system facing the receiving room

PSB Singapore

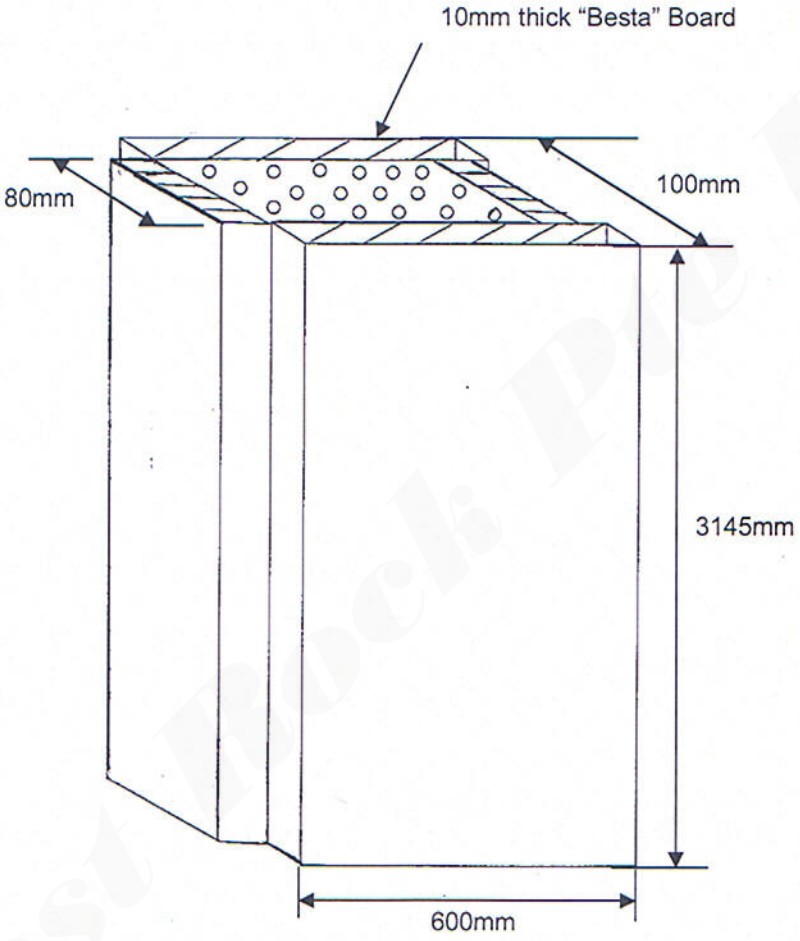

Figure 4 : "Besta" composite mineral board panel

Best Block Pte Ltd

This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.

2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.

3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment.

4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.

5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB, unless the Client has authorised TÜV SÜD PSB in writing to do so.

6. TÜV SÜD PSB may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.

7. All copyright in the report shall remain with TÜV SÜD PSB and the Client shall, upon payment of TÜV SÜD PSB's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.

8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.

9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.

10. Unless otherwise stated, the tests are carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

January 2008

Best Rock Int'l Ltd